



NEPT-UNE

Marine & Leisure special battery



FIAMM



NEPT-UNE



SINIRSIZ ÖZGÜRLÜK İLE GÜÇ

FIAMM Neptune aküler, teknelere, her türlü standart ve gelişmiş karavanlara güç sağlamak için geliştirilmiştir. FIAMM güç çözümleri, dahili aydınlatma ve buzdolapları gibi önemli elektrikli cihazların yanı sıra TV, PC ve mikrodalga fırın gibi aksesuarlara tamamen güvenilir bir şekilde güç vermenizi sağlar.

UYGULAMALAR

Marin

Küçük teknelerden, büyük yatlara

Standart ve Gelişmiş Karavanlar

Standart karavanlardan, uzun süren maceralar için gelişmiş karavanlara.

Hobi

Bahçe ve sebze arazileri

UYGULAMALAR

Starter

Kritik koşullarda bile motorunuzu çalıştırabilmenizi sağlar.
Sadece starter için.

Starter/Servis

Güvenilir, sürekli elektrik güç kaynağı.
Starter ve güç kaynağı.

Servis

Tekne hizmetlerine sürekli güç.
Sadece güç sağlar, starter yoktur.




TEKNOLOJİLER

FIAMM, yeni güç depolama çözümleri bulma konusundaki kararlılığıyla, AGM (Emdirilmiş Cam Elyaf) akülerden SLI / FB (Sulu/Bakımlı Tıp) akülere kadar hareketlilik için bir dizi çözüm sunan yenilikçi ürün ve süreçlere olan bağlılığını pekiştirmiştir.

SULU/BAKIMLI TİP SLI/FB

ŞARJ SIRASINDA SULU/BAKIMLI TİP AĞIR HİZMET AKÜ PERFORMANSI

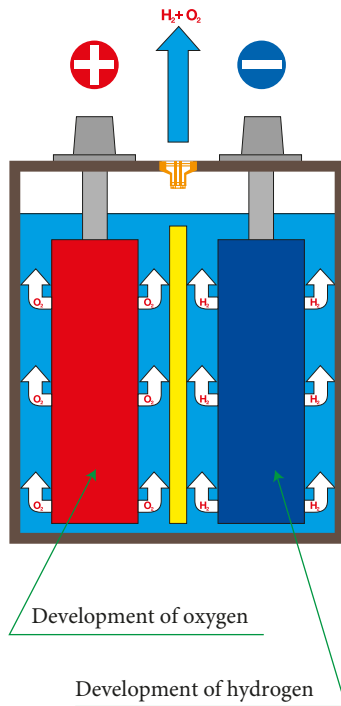


- POSITIVE PLATE
- NEGATIVE
- PLATE
- SEPARATOR
- ELECTROLYTE

AGM VRLA


The main difference between an AGM VRLA battery and a conventional one is the use of gas recombination technology. AGM VRLA technology is ideal for applications demanding high breakaway current, excellent resistance to charge/discharge cycles, zero maintenance and no danger of gas or fluid leaks.

SEALED GAS-RECOMBINATION BATTERY OPERATION

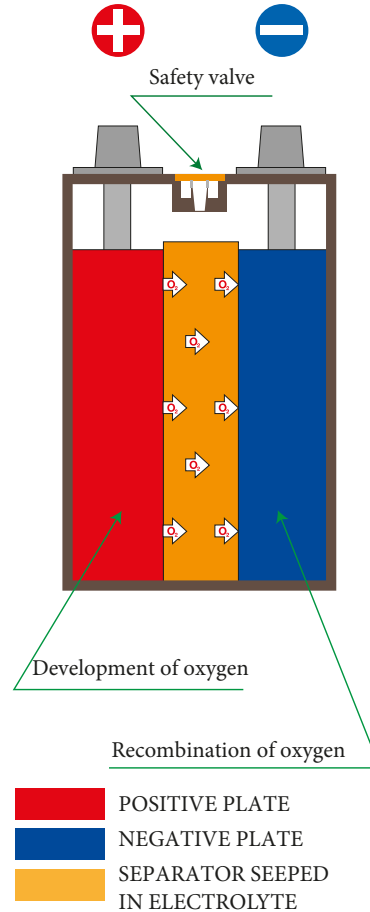



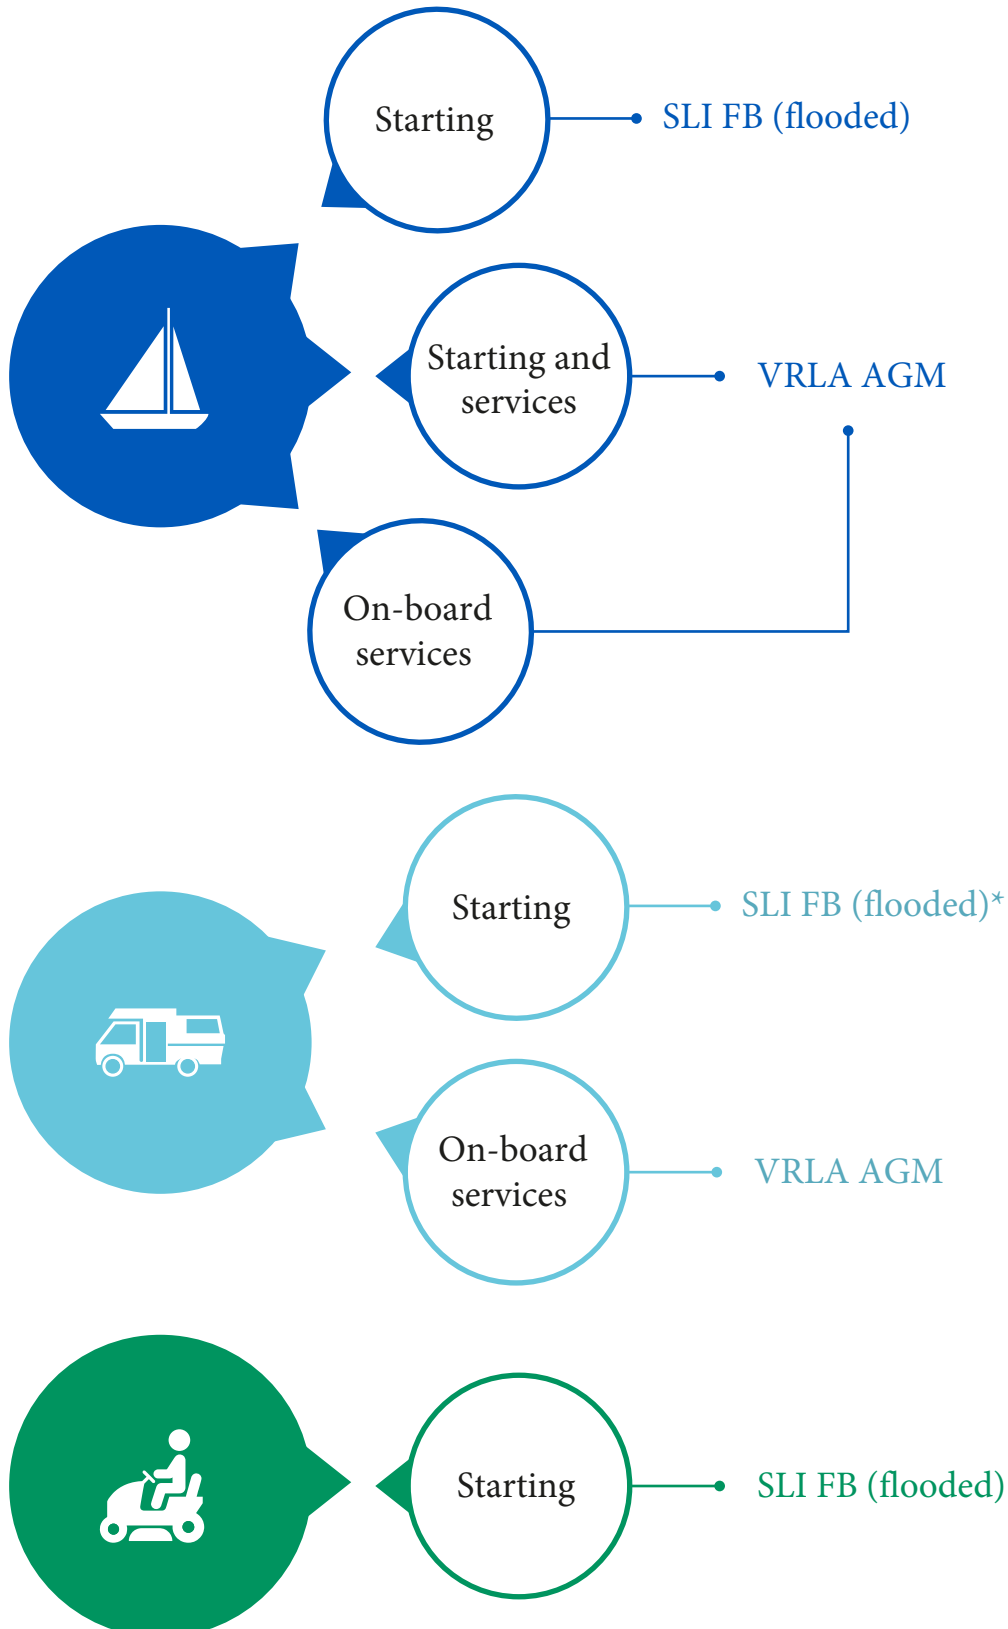





- POSITIVE PLATE
- NEGATIVE PLATE
- SEPARATOR SEEPED
IN ELECTROLYTE

The combination of technologies with applications has driven the development of the new Neptune range, which has been designed to provide the best response to all power requirements.










**our product range is rounded out with our TITANIUM and/or Truck starting batteries*

STARTING - SLI FB (FLOODED)






ID code	V	Capacity Ah C20	CCA A EN	Polarity	Type of terminal	Weight (kg) (+/- 3%)	Layout
UIR 240	12	26	240	0	U1 LUG	7.4	 205x132x186
UI 240	12	26	240	1	U1 LUG	7.4	 205x132x186
MAR 380	12	75	640	1	1	17.8	 259x178x221
MAR 460	12	95	760	0	1	21.8	 305x178x221
MAR 480	12	110	800	0	1	28.2	 349x175x239
MAR 500	12	135	850	3	1	37.7	 513x189x223
MAR 650	12	180	1000	3	1	46.1	 513x223x223
MAR 750	12	225	1150	3	1	60.2	 518x273x242

STARTING AND ON-BOARD SERVICES sealed AGM VRLA

ID code	V	Capacity Ah C20	CCA A EN	Polarity	Type of terminal	Weight (kg) (+/- 3%)	Layout
ASB 60	12	60	680	0	1	17.8	 242x175x190
ASB 70	12	70	760	0	1	20.3	 278x175x190


ID code	V	Capacity Ah C20	CCA A EN	Polarity	Type of terminal	Weight (kg) (+/- 3%)	Layout
ASB 80	12	80	800	0	1	22.9	 315x175x190
ASB 95	12	95	850	0	1	25.7	 353x175x190
ASB 105	12	105	950	0	1	29.0	 394x175x190
ASB 180	12	180	1100	3	1	50.2	 513x223x223
ASB 230	12	230	1200	3	1	63.8	 518x273x242

ON-BOARD SERVICES AND LEISURE sealed AGM VRLA


ID code	V	Capacity Ah C20	Capacity Ah C5	Polarity	Type of terminal	Weight (kg) (+/- 3%)	Layout
LSB 80	12	80	67	1	M6	23.5	 258x166x215
LSB 105	12	105	87	1	M6	32.0	 330x171x222
LSB 125	12	125	99	1	M8	38.0	 410x176x227
LSB 160	12	160	134	1	M8	44.5	 485x172x240
LSB 210	12	210	179	4	M8	62.5	 522x238x223

TYPE OF TERMINAL


TERMINAL

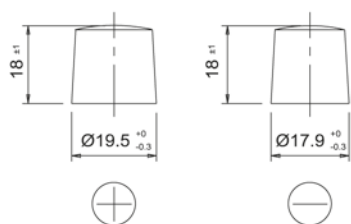


TERMINAL U1 LUG

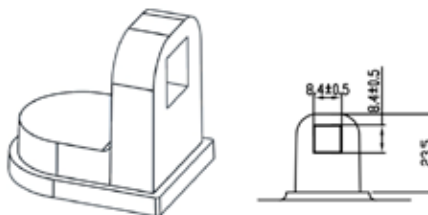




TERMINAL M8 Threaded inserted M8



TERMINAL M6 Threaded inserted M6



POLARITY



It is our goal to provide up-to-date, correct and clear information with this document. Despite our best efforts, this document may not be entirely error-free. FIAMM Energy Technology S.p.A. is not liable for typographical errors or for the accuracy, completeness and timeliness of the information contained in this document.



Headquarters
FIAMM Energy Technology S.p.A.
 Viale Europa, 75
 36075 Montecchio Maggiore (VI) - Italy
 Tel. +39 0444 709311
 Fax +39 0444 709878

A Hitachi Group Company

info.starter@fiamm.com
 www.fiamm.com
 www.fiammnetwork.com

fiamm.batteries
 fiammbatteries
 youtube.com/user/FIAMMvideo